


NOTES:

- 1.) SEAM SEALED WITH FLEXIBLE BUTYL RUBBER SEALANT.

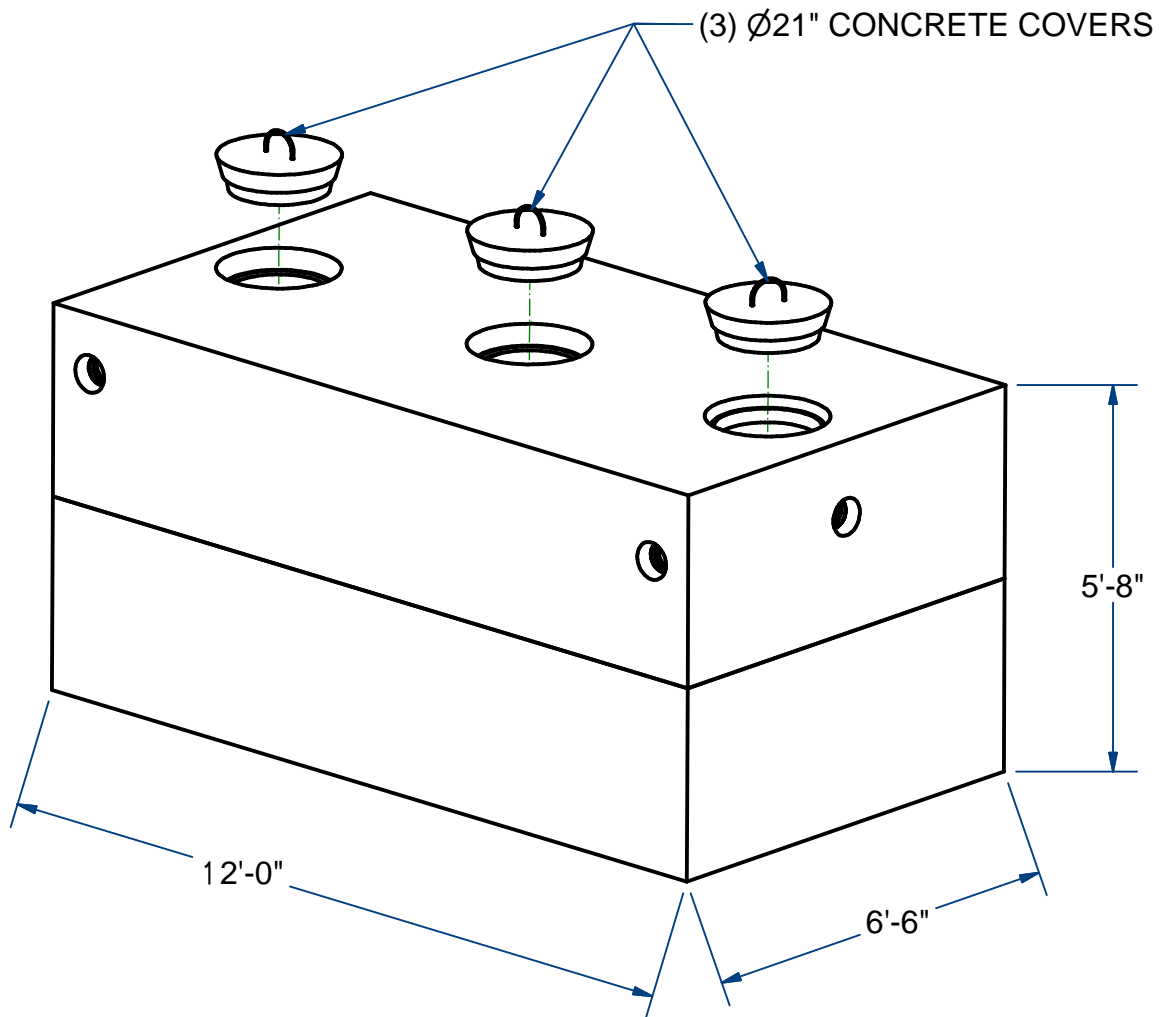

**SEPTIC TANK**

H10



2000 GALLON

# ACME-SHOREY

PRECAST CONCRETE PRODUCTS

**NOTES:**

- 1.) SEAM SEALED WITH FLEXIBLE BUTYL RUBBER SEALANT.

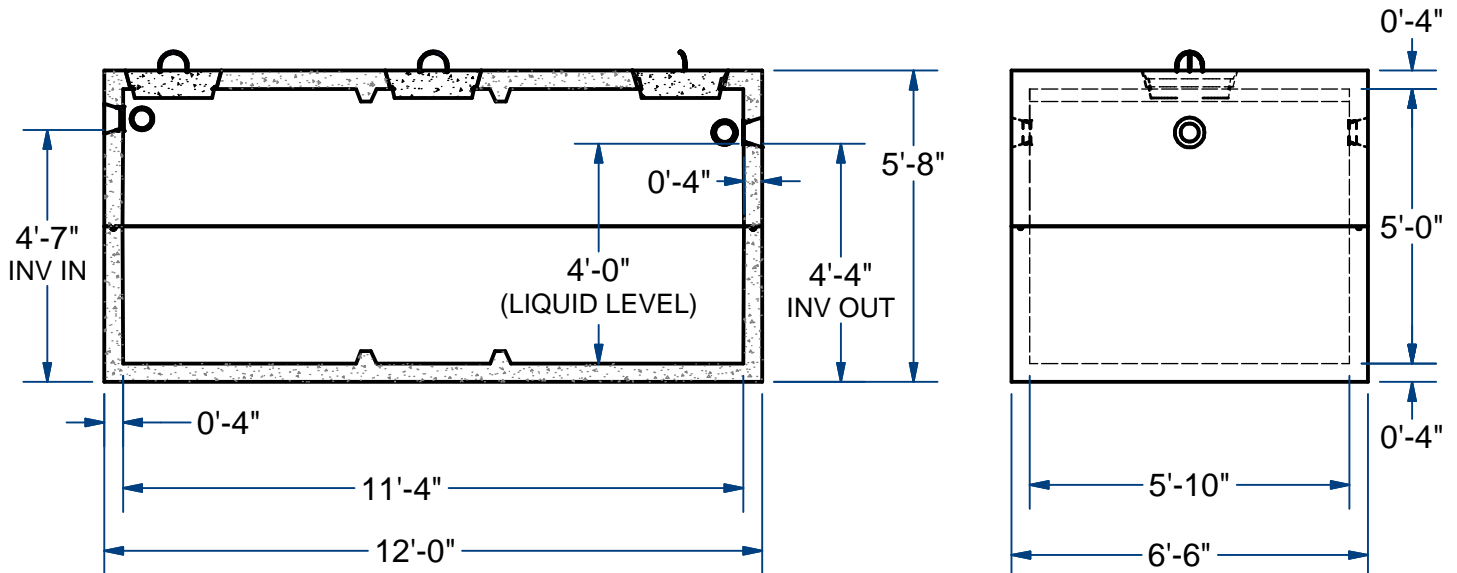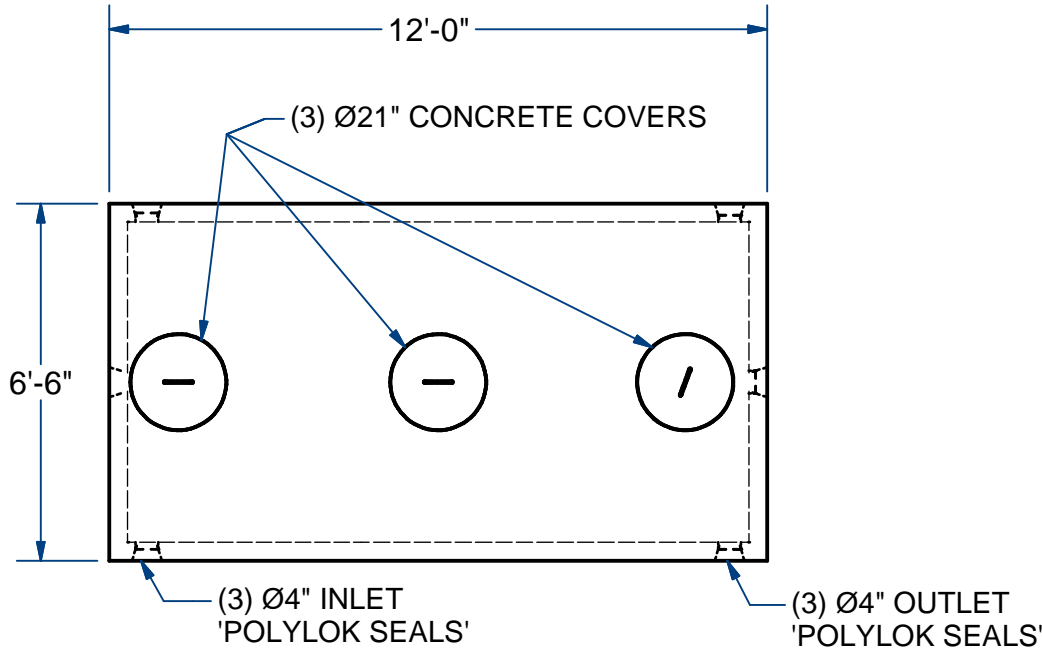

**NAME: SEPTIC TANK , 2000 GALLON**

**H-10**

**ITEM# ST20**

Concrete Minimum Strength: 4,000 p.s.i. at 28 days  
 Steel Reinforcement: ASTM A615, Grade 60  
 Design Loading: standard units - AASHTO - H10

TOP 9,000 Lbs  
 BOTTOM 9,000 Lbs

AS

DATE: 7-9-2018