

ACME-SHOREY

PRECAST CONCRETE PRODUCTS

WWW.ACME-SHOREY.COM

PHONE (508) 548-9607

FAX (508) 548-1664

CARVER, MA


334 TREMONT STREET

HARWICH, MA

36 GREAT WESTERN ROAD

NOTES:

- 1.) USED WITH BIOCLERE MODEL 30/32.
ALSO CAN BE USED FOR MODEL 30/24

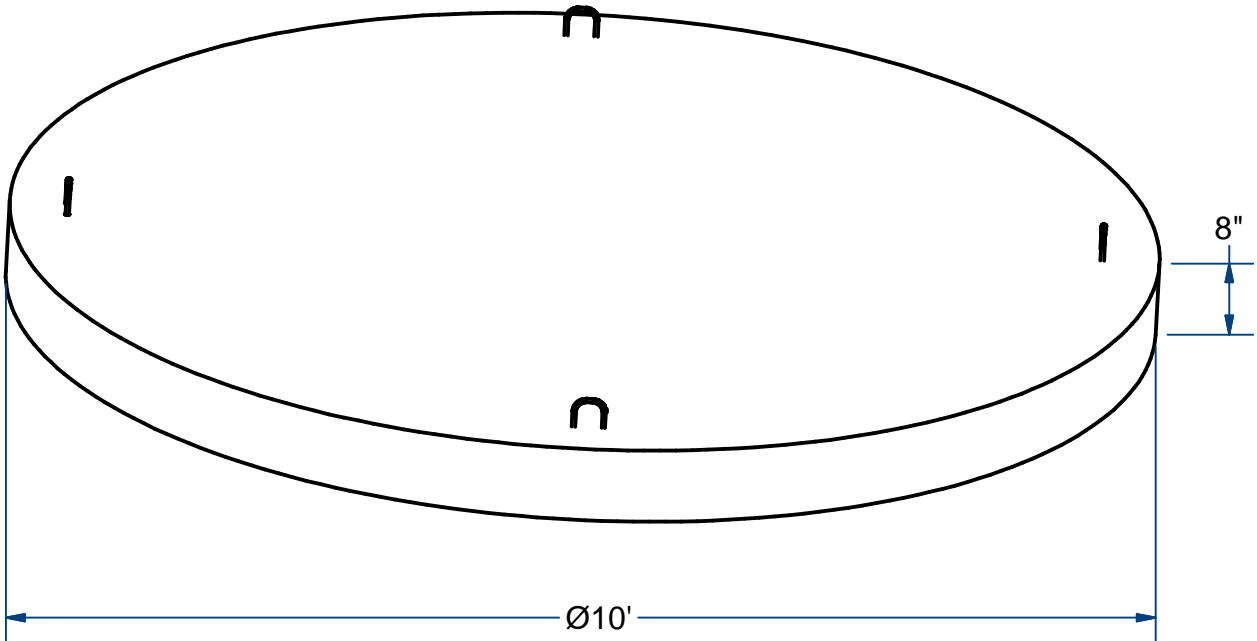

BIOCLERE MOUNTING PAD 10'OD

8" THK

H20

FOR PROCESS INFO
PLEASE CONTACT:



Bioclere technology
phone: +44 (0) 1252 792 688
sales@bioclere.co.uk
www.bioclere.co.uk

ITEM# BCP102

Wt. 8,000 Lbs

14-8.3


Sht 1 of 2

ACME-SHOREY

PRECAST CONCRETE PRODUCTS

NOTES:

- 1.) USE #3 DEFORMED REBAR FOR THE REBAR CAGE.
8" ON CENTER, BOTH WAYS.
3" MINIMUM COVER FOR BOTTOM & SIDES.
- 2.) HOOKS TO BE Ø3/8"x7" LIFTING ANCHOR #LRA387G
REBAR 4" OFF TOP OF PAD.
LEGS TO BE TIED TO REBAR CAGE.

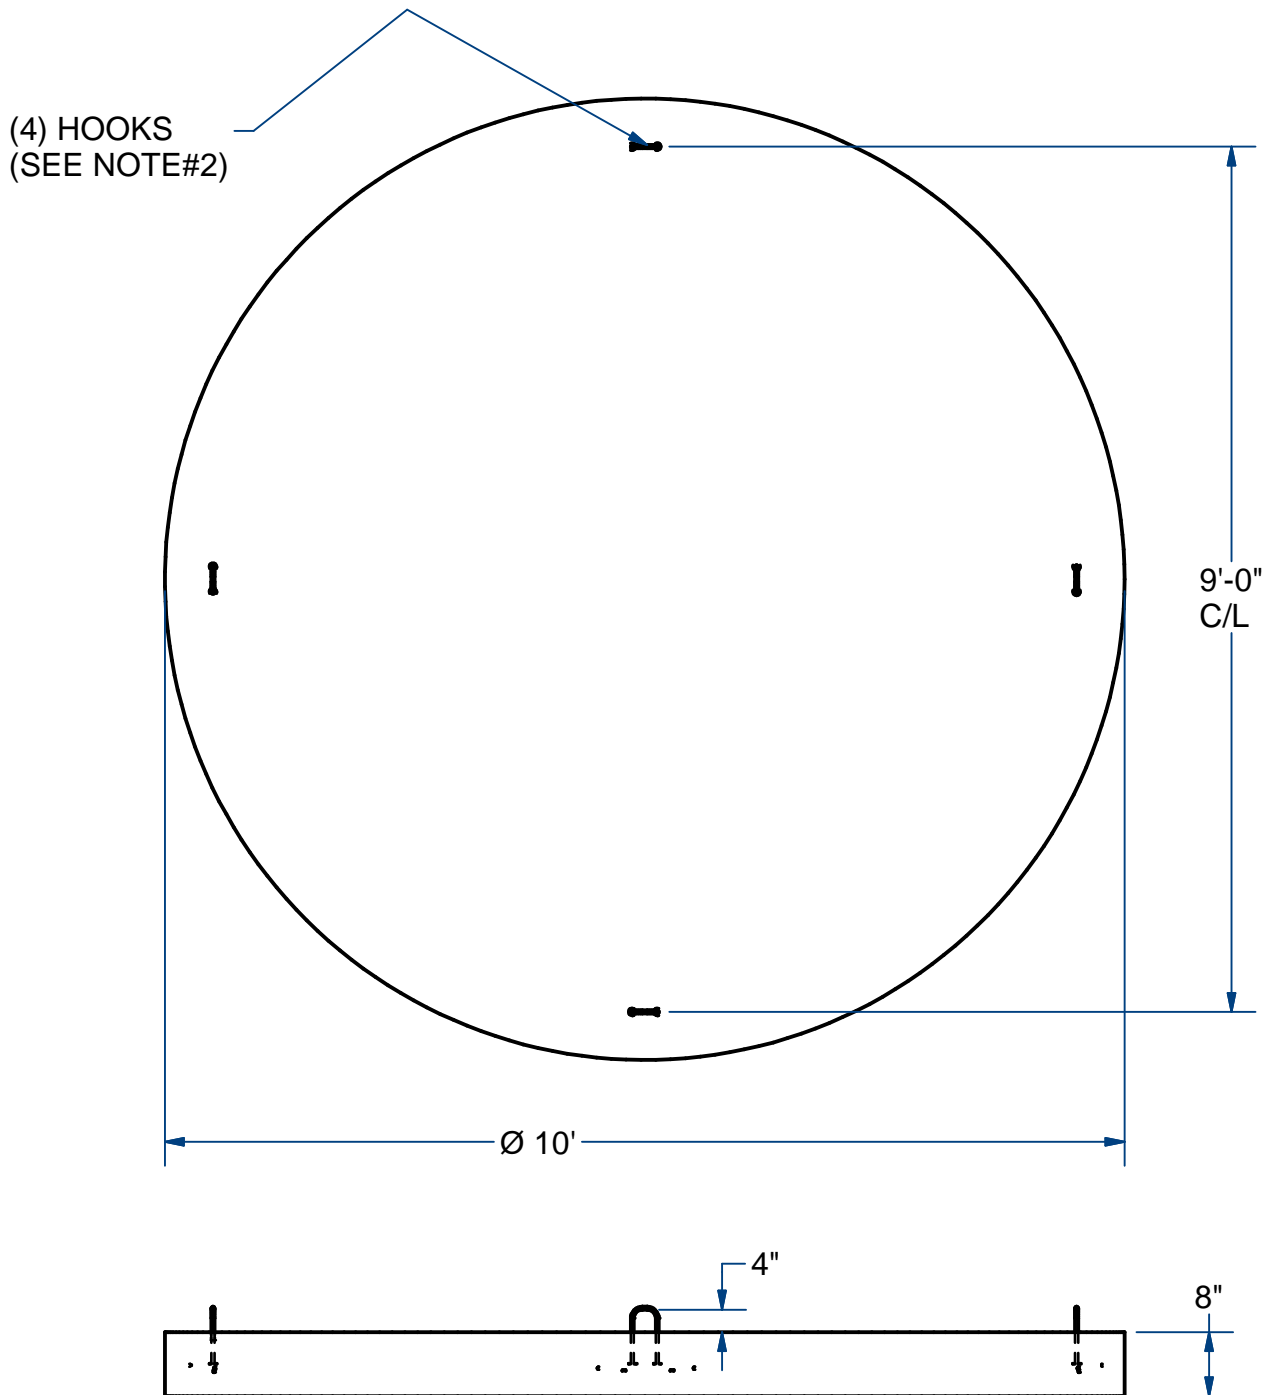

NAME: BIOCLERE MOUNTING PAD, 10'OD x 8" thk
(USED ON BIOCLERE MODEL 30/32)

H-20

ITEM# BCP102

Concrete Minimum Strength: 5,000 p.s.i. at 28 days
Steel Reinforcement: ASTM A615, Grade 60
Design Loading: standard units - AASHTO - H20

WEIGHT 8,000

Lbs

C

DATE: 6-19-23

Ch 14 Pg 8.3 Sht 2 of 2